

SRS 1-6 SPW V4

Ugaona ploča za navarivanje i postavljanje pomoću zavrtnja

HANSA FLEX

Osobine


Konstrukcija ugao 90°

Konstrukcija za cevnu obujmicu

Serijski lak

Norma DIN 3015-1

Materijal plemeniti čelik 1.4571

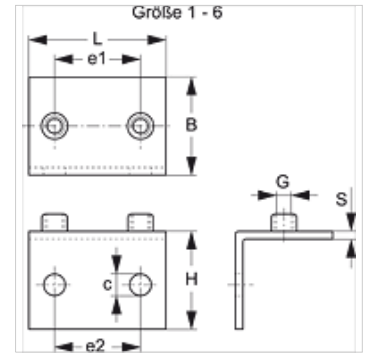

Artikal

Naziv	Veličina obujmice	B (mm)	C (mm)	e1 (mm)	e2 (mm)	G	H (mm)	L (mm)	S (mm)
SRS SPW 1 A V4	1	30	6,6	20,0	20	M 6	30	36,0	3
SRS SPW 2 V4	2	30	6,6	26,0	26	M 6	30	42,0	3
SRS SPW 3 V4	3	30	6,6	33,0	33	M 6	30	50,0	3
SRS SPW 4 V4	4	30	6,6	40,0	40	M 6	30	59,0	3
SRS SPW 5 V4	5	30	6,6	52,0	52	M 6	30	72,0	3
SRS SPW 6 V4	6	30	6,6	66,0	66	M 6	30	88,0	3

Varijante proizvoda

SRS 1-6 SPW Ugaona ploča za navarivanje i postavljanje pomoću zavrtnja, čelik