

# SRS 1-6 SPW V4

Ugaona ploča za navarivanje i postavljanje pomoću zavrtnja

**HANSA FLEX**

## Osobine


Konstrukcija ugao 90°

Konstrukcija za cevnu obujmicu

Serijski lak

Norma DIN 3015-1

Materijal plemeniti čelik 1.4571

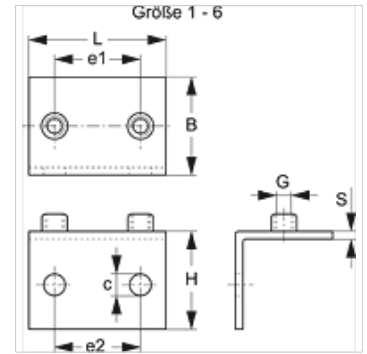

## Artikal

| Naziv          | Veličina obujmice | B<br>(mm) | C<br>(mm) | e1<br>(mm) | e2<br>(mm) | G   | H<br>(mm) | L<br>(mm) | S<br>(mm) |
|----------------|-------------------|-----------|-----------|------------|------------|-----|-----------|-----------|-----------|
| SRS SPW 1 A V4 | 1                 | 30        | 6,6       | 20,0       | 20         | M 6 | 30        | 36,0      | 3         |
| SRS SPW 2 V4   | 2                 | 30        | 6,6       | 26,0       | 26         | M 6 | 30        | 42,0      | 3         |
| SRS SPW 3 V4   | 3                 | 30        | 6,6       | 33,0       | 33         | M 6 | 30        | 50,0      | 3         |
| SRS SPW 4 V4   | 4                 | 30        | 6,6       | 40,0       | 40         | M 6 | 30        | 59,0      | 3         |
| SRS SPW 5 V4   | 5                 | 30        | 6,6       | 52,0       | 52         | M 6 | 30        | 72,0      | 3         |
| SRS SPW 6 V4   | 6                 | 30        | 6,6       | 66,0       | 66         | M 6 | 30        | 88,0      | 3         |

## Varijante proizvoda

SRS 1-6 SPW Ugaona ploča za navarivanje i postavljanje pomoću zavrtnja, čelik