


### Osobine

<b>Oblast primene</b>	Priključna armatura za metalna creva
<b>Priključak 1</b>	Navojni naglavak sa cilindričnim, colovanim unutrašnjim navojem
<b>Norma</b>	DIN EN 10226 / ISO 7-1
<b>Konstrukcija</b>	pravo
<b>Materijal</b>	Temper liv
<b>Primena</b>	model sa lemom postojan na temperaturi do 200 °C

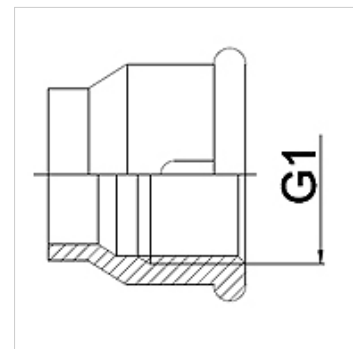

### Napomena

The specified working pressure PN(bar) relates to the working temperature of -20 °C to 120 °C. At working temperature of 120 °C to 200 °C the working pressure PN (bar) reduces to 22,7 bar.

### Napomene u vezi porudžbine

Ostali modeli na zahtev

### Artikal

Naziv	DN	PN (bar)	G1
WA 004 IR	4	25	Rp 1/8"
WA 006 IR	6	25	Rp 1/4"
WA 010 IR	10	25	Rp 3/8"
WA 013 IR	13	25	Rp 1/2"
WA 020 IR	20	25	Rp 3/4"
WA 025 IR	25	25	Rp 1"
WA 032 IR	32	25	Rp 1.1/4"
WA 040 IR	40	25	Rp 1.1/2"
WA 050 IR	50	25	Rp 2"
WA 065 IR	65	25	Rp 2.1/2"
WA 080 IR	80	25	Rp 3"
WA 100 IR	100	25	Rp 4"

### Varijante proizvoda

<b>WA IR RG</b>	Priključni deo ... IR, crveni mesing, Crveni liv
<b>WA IR ST</b>	Priključni deo ... IR čelik, čelik (koji se može zavarivati)
<b>WA IR VA</b>	Priključni deo ... IR VA, plemeniti čelik