


# WA VB

Priključni deo ... VB temper liv

**HANSA FLEX**

## Osobine

<b>Oblast primene</b>	Priključna armatura za metalna creva
<b>Priključak 1</b>	colovani cilindrični unutrašnji navoj
<b>Oblik zaptivke 1</b>	konusno zaptivanje
<b>Norma</b>	DIN EN 10226 / ISO 7-1
<b>Konstrukcija</b>	pravo
<b>Primena</b>	model sa lemom postojan na temperaturi do 200 °C
<b>Verzija</b>	3-delni navojni spoj
<b>Materijal</b>	Temper liv

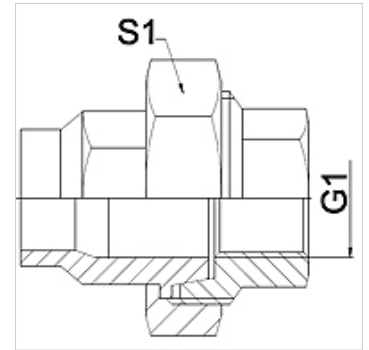

## Napomena

Navedene širine ključeva predstavljaju orijentacione vrednosti!

The specified working pressure PN(bar) relates to the working temperature of -20 °C to 120 °C. At working temperature of 120 °C to 200 °C the working pressure PN (bar) reduces to 22,7 bar.

## Napomene u vezi porudžbine

Ostali modeli na zahtev

## Artikal

Naziv	DN	PN (bar)	G1	S1 (mm)
WA 006 VB	6	25	Rp 1/4"	28,0
WA 010 VB	10	25	Rp 3/8"	32,0
WA 013 VB	13	25	Rp 1/2"	39,0
WA 020 VB	20	25	Rp 3/4"	48,0
WA 025 VB	25	25	Rp 1"	55,0
WA 032 VB	32	25	Rp 1.1/4"	67,0
WA 040 VB	40	25	Rp 1.1/2"	74,0
WA 050 VB	50	25	Rp 2"	90,0
WA 065 VB	65	25	Rp 2.1/2"	111,0
WA 080 VB	80	25	Rp 3"	130,0
WA 100 VB	100	25	Rp 4"	151,0

## Varijante proizvoda

<b>WA VB RG</b>	Priključni deo ... VB, crveni mesing, Crveni liv
<b>WA VB VA</b>	Priključni deo ... VB VA, plemeniti čelik