


HK AZ55 RV

Nepovratni ventil 700 bar

Osobine

| | |
|--------------------|----------------|
| Radni pritisak | maks. 700 bara |
| Zapreminski protok | maks. 25 l/min |

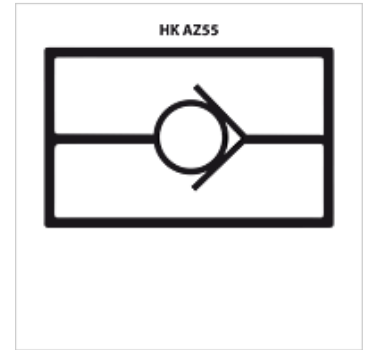

Artikal

| Naziv | Navoj | L (mm) | SW (mm) | Težina (kg) |
|------------|----------|-----------|------------|----------------|
| HK AZ 5500 | 3/8" NPT | 101 | 35 | 0,7 |

Pribor

| | |
|-------------|---|
| NY 2100 | Termoplastično crevo za veoma veliki pritisak |
| GKS | Gumena zaštita od preloma |
| PNY 2100 HN | Pritisna nazuvica, AGN |
| PHY 2100 | Pritisni priključak, NY 2100 |
| SKL HN SP | Navojna spojnica-fiksna polovica |
| SKL ZUBS SP | Zaštita od prašine za SKL..SP |
| SKF IN SP | Navojna spojnica-fiksna polovica |
| SKF ZUBS SP | Zaštita od prašine za SKF..SP |