


HK DFE 6

6/2-magnetni račvasti ventil za ugradnju u cevovodu

HANSA FLEX

Osobine

| | |
|-----------------------|--|
| Verzija | sa nužnim ručnim korišćenjem Zaptivke NBR |
| Obim isporuke | sa kalemom, bez utikača |
| Radni pritisak | maks. 315 bar sa priključkom curenja ulja/ maks. 200 bar bez priključka curenja ulja |

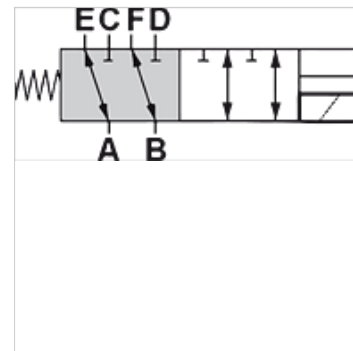

Opis

Ovi račvasti ventili (ventilske skretnice) služe za izborno napajanje dveju hidrauličkih cirkulacija
Magnetni kalem IP66

Napomene u vezi porudžbine

druga upravljačka napona mogu se isporučiti na zahtev

Artikal

| Naziv | Q max. (L/min) | Upravljački napon | A (mm) | Priključak A-F | Priključak, ulje koje curi | B (mm) | C (mm) | D (mm) | Verzija | Težina (kg) |
|---------------------|-------------------|-------------------|-----------|----------------|----------------------------|-----------|-----------|-----------|------------------------------------|----------------|
| HK DFE 052 6AW 12DC | 60 | 12 VDC | 181,0 | G 3/8" | - | 76,0 | 80,0 | 55,0 | bez priključka curenja ulja | 1,9 |
| HK DFE 052 6AW 24DC | 60 | 24 VDC | 181,0 | G 3/8" | - | 76,0 | 80,0 | 55,0 | bez priključka curenja ulja | 1,9 |
| HK DFE 052 6AY 12DC | 60 | 12 VDC | 181,0 | G 3/8" | G 1/4" | 76,0 | 80,0 | 55,0 | sa bočnim priključkom curenja ulja | 1,9 |
| HK DFE 052 6AY 24DC | 60 | 24 VDC | 181,0 | G 3/8" | G 1/4" | 76,0 | 80,0 | 55,0 | sa bočnim priključkom curenja ulja | 1,9 |
| HK DFE 100 6AW 12DC | 90 | 12 VDC | 241,0 | G 1/2" | - | 89,0 | 121,0 | 62,0 | bez priključka curenja ulja | 3,7 |
| HK DFE 100 6AW 24DC | 90 | 24 VDC | 241,0 | G 1/2" | - | 89,0 | 121,0 | 62,0 | bez priključka curenja ulja | 3,7 |
| HK DFE 100 6AY 12DC | 90 | 12 VDC | 241,0 | G 1/2" | G 1/4" | 89,0 | 121,0 | 62,0 | sa bočnim priključkom curenja ulja | 3,7 |
| HK DFE 100 6AY 24DC | 90 | 24 VDC | 241,0 | G 1/2" | G 1/4" | 89,0 | 121,0 | 62,0 | sa bočnim priključkom curenja ulja | 3,7 |
| HK DFE 200 6AW 12DC | 140 | 12 VDC | 262,0 | G 3/4" | - | 105,0 | 107,0 | 75,0 | bez priključka curenja ulja | 5,3 |
| HK DFE 200 6AW 24DC | 140 | 24 VDC | 262,0 | G 3/4" | - | 105,0 | 107,0 | 75,0 | bez priključka curenja ulja | 5,3 |
| HK DFE 200 6AY 12DC | 140 | 12 VDC | 262,0 | G 3/4" | G 1/4" | 105,0 | 107,0 | 75,0 | sa bočnim priključkom curenja ulja | 5,3 |
| HK DFE 200 6AY 24DC | 140 | 24 VDC | 262,0 | G 3/4" | G 1/4" | 105,0 | 107,0 | 75,0 | sa bočnim priključkom curenja ulja | 5,3 |

Qmax - maks. volumen protoka

Pribor

HK SP DIN 43650 Električni utikač za magnetni kalem DIN 43650 / ISO 4400

Rezervni delovi

HK SP DFE Kalem za magnetni račvasti ventil HK DFE