


# KLEMMSCHEL

Clamp, Aluminium

**HANSA FLEX**

## Osobine

|                           |  |
|---------------------------|--|
| <b>Primena</b>            | Clamping components for small flange connections |
| <b>Verzija</b>            | Clamp aluminum                                   |
| <b>Norma</b>              | DIN 28403<br>ISO 2861                            |
| <b>Materijal</b>          | Aluminijum                                       |
| <b>Temperaturni opseg</b> | Aluminijum od -156 °C do 150 °C                  |

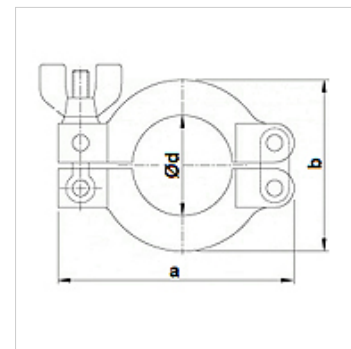

## Napomena

Opseg pritiska od 10–7 mbar do 2,5 bar

## Napomene u vezi porudžbine

Ostali modeli na zahtev

## Artikal

| Naziv             | Šrina<br>(mm) | a<br>(mm) | b<br>(mm) | Ø d<br>(mm) |
|-------------------|---------------|-----------|-----------|-------------|
| KLEMMSCHEL 010/16 | 17,0          | 63,0      | 45,0      | 22,0        |
| KLEMMSCHEL 020/25 | 17,0          | 73,0      | 52,0      | 32,0        |
| KLEMMSCHEL 032/40 | 17,0          | 93,0      | 70,0      | 47,0        |
| KLEMMSCHEL 050    | 22,0          | 114,0     | 95,0      | 62,0        |