



## Osobine

|                  |   |
|------------------|---|
| Konstrukcija     | Skidač  |
| Brzina max.      | 1,0 m/s   |
| Temperatura min. | -40 °C  |
| Temperatura max. | 120 °C  |
| Mediji           | Mineralna ulja<br>Voda vazduh   |
| Montaža          | utiskuje se u otvoreni žleb   |
| Materijal        | (1) Metalni skidač: mesing (INOX na zahtev)<br>(2) Škidač od elastomera: NBR (FPM na zahtev)<br>(3) Čaura: čelik (INOX na zahtev)<br>(4) Distancioni elementi: čelik (INOX na zahtev) |
| Primena          | Hidraulika  |



| Toleranz / Tolerance |    |            |
|----------------------|----|------------|
| d                    | D  | L          |
| f8 / h9              | H8 | +0,20<br>0 |

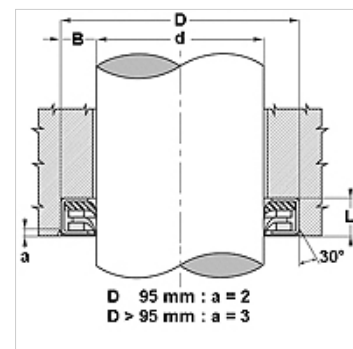

## Opis

Mala potreba za prostorom  
efikasno skidanje pod ekstremnim uslovima rada.  
podesno za led, sunđer i čestice koje veoma jako prijanjaju  
plivajući metalni jezičak skidača dozvoljava pomeranje šipke.

## Artikal

| Naziv            | d<br>(mm) | D<br>(mm) | L<br>(mm) | H<br>(mm) |
|------------------|-----------|-----------|-----------|-----------|
| DR 14            | 14        | 27        | 7,0       | 6,5       |
| DR 16            | 16        | 29        | 7,0       | 6,5       |
| DR 20            | 20        | 33        | 7,0       | 6,5       |
| DR 22            | 22        | 35        | 7,0       | 6,5       |
| DR 25            | 25        | 38        | 7,0       | 6,5       |
| DR 28            | 28        | 41        | 7,0       | 6,5       |
| DR 28 SS-FKM-SS  | 28        | 41        | 7,0       | 6,5       |
| DR 30            | 30        | 43        | 7,5       | 7,0       |
| DR 35            | 35        | 48        | 7,5       | 7,0       |
| DR 36            | 36        | 49        | 7,5       | 7,0       |
| DR 38            | 38        | 51        | 7,5       | 7,0       |
| DR 40            | 40        | 53        | 7,5       | 7,0       |
| DR 45            | 45        | 58        | 7,5       | 7,0       |
| DR 50            | 50        | 64        | 8,0       | 7,5       |
| DR 50-R-9975-R   | 50        | 64        | 8,0       | 7,5       |
| DR 55            | 55        | 69        | 8,0       | 7,5       |
| DR 60            | 60        | 74        | 8,0       | 7,5       |
| DR 70            | 70        | 84        | 8,0       | 7,5       |
| DR 75            | 75        | 89        | 8,0       | 7,5       |
| DR 80            | 80        | 96        | 8,5       | 8,0       |
| DR80 - SS-FKM-SS | 80        | 96        | 8,5       | 8,0       |
| DR 90            | 90        | 106       | 8,5       | 8,0       |
| DR 150           | 150       | 170       | 9,0       | 8,5       |