

DSR U FPM


Dupli skidač, DSR-U-FPM

Osobine

| | |
|------------------|---|
| Konstrukcija | Skidač |
| Brzina max. | 0,5 m/s |
| Temperatura min. | -30 °C |
| Temperatura max. | 110 °C |
| Mediji | Mineralna ulja Vodene emulzije |
| Montaža | Skidač oblikovati u oblik bubrega i pritisnuti u prihvatni žleb |
| Primena | Hidraulika |
| Materijal | FPM |



| Toleranz / Tolerance | | | | | |
|----------------------|-----|------------|-----|-----|------------|
| d | D | L | C | F | G |
| h11 | H11 | +0,20 0 | H10 | H11 | +0,20 0 |

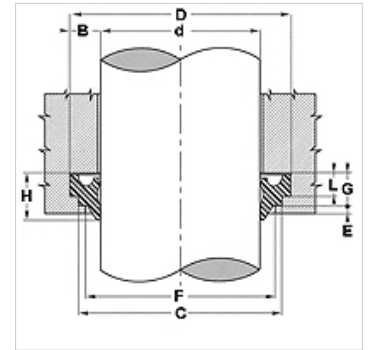

Opis

jednostavna montaža

Artikal

| Naziv | D (mm) | d (mm) | E (mm) | L (mm) | C (mm) |
|--------------|-----------|-----------|-----------|-----------|-----------|
| DSR 56-U FPM | 64 | 56 | 1,0 | 4,0 | 62 |