


Osobine

| | |
|------------------|-----------------------------------|
| Konstrukcija | Skidač |
| Brzina max. | 0,5 m/s |
| Temperatura min. | -20 °C |
| Temperatura max. | 200 °C |
| Mediji | Mineralna ulja Vodene emulzije |
| Montaža | utiskuje se u otvoreni žleb |
| Materijal | (1) Čaura: čelik Skidač: FPM |
| Primena | Hidraulika |



| Toleranz / Tolerance | | |
|----------------------|----|------------|
| d | D | L |
| h11 | H8 | +0,20 0 |

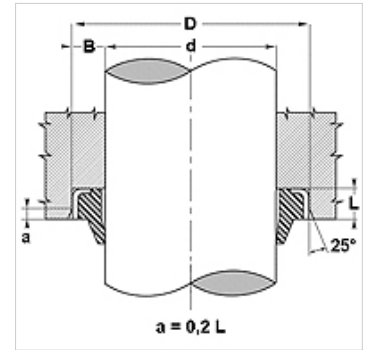

Opis

Mala potreba za prostorom
bez prodirana prijavštine preko spoljašnjeg metalnog prstena.
Jednostavno rešenje.

Napomene u vezi porudžbine

Molimo kontaktirajte nas ukoliko imate pitanja u vezi posebnih uslova rada (tečnosti, temperatura, pritisak ...).

Artikal

| Naziv | d (mm) | D (mm) | L (mm) | H (mm) |
|----------------|-----------|-----------|-----------|-----------|
| GA 16 22-3 FPM | 16 | 22 | 3,0 | 4 |
| GA 25 35-7 FPM | 25 | 35 | 7,0 | 10 |
| GA 30 40-7 FPM | 30 | 40 | 7,0 | 10 |
| GA 32 45-4 FPM | 32 | 45 | 4,0 | 8 |
| GA 45 55-7 FPM | 45 | 55 | 7,0 | 10 |
| GA 45 60-7 FPM | 45 | 60 | 7,0 | 10 |
| GA 50 56-5 FPM | 50 | 56 | 5,0 | 8 |
| GA 60 70-7 FPM | 60 | 70 | 7,0 | 10 |
| GA 63 75-7 FPM | 63 | 75 | 7,0 | 10 |
| GA 70 80-7 FPM | 70 | 80 | 7,0 | 10 |