


## Osobine

<b>Konstrukcija</b>	Žlebasti prsten šipke
<b>Radni pritisak</b>	maks. do 500 bara
<b>Brzina max.</b>	0,5 m/s
<b>Temperatura min.</b>	-30 °C
<b>Temperatura max.</b>	80 °C
<b>Mediji</b>	Mineralna ulja
<b>Montaža</b>	u zatvorenim žlebovima A u otvorenim žlebovima B
<b>Materijal</b>	(1) Zaptivka: PUR (2) Potporni prsten: acetalna smola / PTBR
<b>Primena</b>	Hidraulika



Druck bar	Spaltmaß / Clearance e (mm)			
	RS...-L		RS...-LA	
	d<60mm	d>60mm	d<60mm	d>60mm
50	< 0,40	< 0,50	< 0,60	< 0,80
100	< 0,30	< 0,40	< 0,60	< 0,80
200	< 0,20	< 0,30	< 0,40	< 0,60
300	< 0,15	< 0,20	< 0,30	< 0,40
400	< 0,10	< 0,15	< 0,20	< 0,30
500			< 0,10	< 0,15

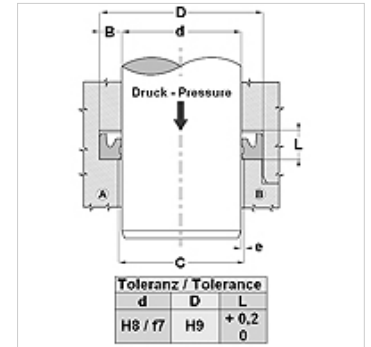

## Opis

zaptivka sa malim koeficijentom trenja.  
veoma otporno na habanje  
Jednostavno rešenje.  
Podesno za teleskopske cilindre.

## Artikal

Naziv	D (mm)	d (mm)	L (mm)	Žlebovi u skladu s
RS 45 52-LA	52,0	45	14,0	-
RS 50 60-LA	60,0	50	8,0	-
RS 50 70-LA	70,0	50	13,0	-
RS 60 68-LA	68,0	60	14,0	-
RS 60 69-LA	69,0	60	11,0	-
RS 60 80-LA	80,0	60	13,0	-
RS 63 83-LA	83,0	63	13,0	-
RS 70 85-LA	85,0	70	12,5	-
RS 78 86-LA	86,0	78	14,0	-
RS 80 95-LA	95,0	80	12,5	ISO 5597
RS 97 105-LA	105,0	97	14,0	-
RS 100 120-LA	120,0	100	14,5	-
RS 118 126-LA	126,0	118	14,0	-
RS 125 145-LA	145,0	125	13,0	-
RS 143 151-LA	151,0	143	14,0	-