

# PA 700 SF 90

Utična armatura, SFL W90°

**HANSA FLEX**

## Osobine

**Oblast primene** Utična armatura za creva HD 400

**Priključak 1** SAE priključak priрубnice 3000 PSI

**Oblik zaptivke 1** ravno zaptivanje sa SF O-prstenom

**Skraćenica** SFL


**Norma** SAE J518  
ISO 6162-1

**Uvezivanje** sa osiguračem kidanja (interlock)

**Obim isporuke** Pritisna nazuvica + pritisni priključak

**Materijal** čelik

**Površinska zaštita** galvanska prevlaka

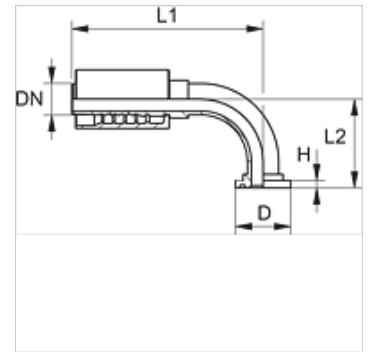

## Artikal

Naziv	DN	Veličina	col	Veličina spojnice	Radni pritisak (bar)	D (mm)	H (mm)	L1 (mm)	L2 (mm)
PA 713 SF 90	12	8	1/2"	1/2"	350,0	30,2	6,7	85,9	45,0
PA 713 SF 20 90	12	8	1/2"	3/4"	350,0	38,1	6,7	96,0	51,0
PA 720 SF 90	19	12	3/4"	3/4"	350,0	38,1	6,8	127,5	58,0
PA 720 SF 25 90	19	12	3/4"	1"	320,0	44,5	8,1	127,5	61,0
PA 725 SF 20 90	25	16	1"	3/4"	320,0	38,1	6,8	144,0	64,5
PA 725 SF 90	25	16	1"	1"	280,0	44,5	8,1	158,0	67,0
PA 725 SF 32 90	25	16	1"	1.1/4"	280,0	50,8	8,1	158,0	69,5