

PA 700 SF6 90

Utična armatura, SFS W90°

HANSA FLEX

Osobine

Oblast primene Utična armatura za creva HD 400

Priključak 1 SAE priključak priрубnice 6000 PSI

Oblik zaptivke 1 ravno zaptivanje sa SF O-prstenom

Skraćenica SFS


Norma SAE J518
ISO 6162-2

Uvezivanje sa osiguračem kidanja (interlock)

Obim isporuke Pritisna nazuvica + pritisni priključak

Materijal čelik

Površinska zaštita galvanska prevlaka

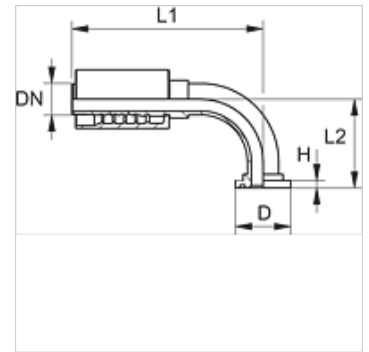

Artikal

| Naziv | DN | Veličina | col | Veličina spojnice | Radni pritisak (bar) | D (mm) | H (mm) | L1 (mm) | L2 (mm) |
|------------------|----|----------|------|-------------------|----------------------|--------|--------|---------|---------|
| PA 713 SF6 90 | 12 | 8 | 1/2" | 1/2" | 420,0 | 31,8 | 7,7 | 86,0 | 46,0 |
| PA 713 SF6 20 90 | 12 | 8 | 1/2" | 3/4" | 420,0 | 41,3 | 8,8 | 92,5 | 46,0 |
| PA 716 SF6 13 90 | 16 | 10 | 5/8" | 1/2" | 420,0 | 31,8 | 7,7 | 108,0 | 48,0 |
| PA 716 SF6 20 90 | 16 | 10 | 5/8" | 3/4" | 420,0 | 41,3 | 8,8 | 107,5 | 52,5 |
| PA 716 SF6 25 90 | 16 | 10 | 5/8" | 1" | 420,0 | 47,6 | 9,5 | 108,0 | 57,0 |
| PA 720 SF6 90 | 19 | 12 | 3/4" | 3/4" | 420,0 | 41,3 | 8,8 | 127,5 | 62,0 |
| PA 720 SF6 25 90 | 19 | 12 | 3/4" | 1" | 420,0 | 47,6 | 9,6 | 127,5 | 68,0 |
| PA 725 SF6 20 90 | 25 | 16 | 1" | 3/4" | 420,0 | 41,3 | 8,8 | 152,5 | 70,5 |
| PA 725 SF6 90 | 25 | 16 | 1" | 1" | 420,0 | 47,6 | 9,6 | 158,0 | 74,0 |
| PA 725 SF6 32 90 | 25 | 16 | 1" | 1.1/4" | 420,0 | 54,0 | 10,4 | 156,0 | 83,5 |