


# HK B3/B14 230/400V

Elektromotor B3/B14 230/400V

**HANSA FLEX**

## Osobine

|                            |   |
|----------------------------|---|
| <b>Verzija</b>             | Konstrukcija B3/B14 sa stopalima koja se mogu skinuti |
| <b>Vrsta zaštite</b>       | IP 55   |
| <b>Temperatura okoline</b> | -20 °C do +40 °C                                      |
| <b>Materijal</b>           | Kućište: Aluminijum lakirano                          |

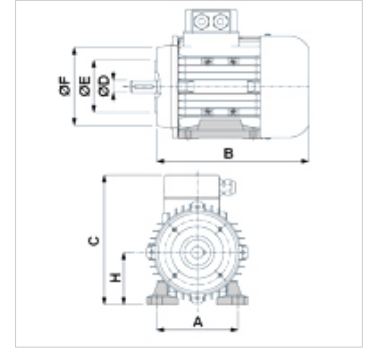

## Opis

Motori sa kratkospojnim rotorom i sopstvenim hlađenjem  
Dimenzionisani napon 230/400V 50Hz, 460V 60Hz; 4-polno

## Artikal

| Naziv         | n 50 Hz<br>(rpm) | P 50 Hz<br>(kW) | I 50 Hz<br>(A) | LF 50 Hz | H<br>(mm) | A<br>(mm) | B<br>(mm) | C<br>(mm) | Ø D osovina<br>(mm) | Ø E<br>(mm) | Ø F<br>(mm) | Težina<br>(kg) |
|---------------|------------------|-----------------|----------------|----------|-----------|-----------|-----------|-----------|---------------------|-------------|-------------|----------------|
| HK K 401 FCPA | 1360             | 0,18            | 0,60           | 0,73     | 63        | 100       | 194       | 174       | 11                  | 60          | 90          | 4,5            |
| HK K 402 FCPA | 1380             | 0,25            | 0,80           | 0,74     | 71        | 112       | 215       | 189       | 14                  | 70          | 105         | 6,0            |
| HK K 403 FCPA | 1380             | 0,37            | 1,10           | 0,75     | 71        | 112       | 215       | 189       | 14                  | 70          | 105         | 6,5            |
| HK K 404 FCPA | 1380             | 0,55            | 1,50           | 0,75     | 80        | 125       | 250       | 209       | 19                  | 80          | 120         | 9,0            |

P 50 Hz = nominal output at 400 V/50 Hz – n 50 Hz = nominalni broj obrtaja pri 400 V/50 Hz – I 50 Hz = nominalna struja pri 400 V/50 Hz – LF 50 Hz = koeficijent snage cos phi pri 50 Hz