



HK GEH 30 GGG

Kučiče ventila za uvrtni ventil SAE 3-kraki, GGG40

HANSA FLEX

Osobine

Materijal	GGG 40
Radni pritisak	maks. 350 bara
Površinska zaštita	pocinkovan

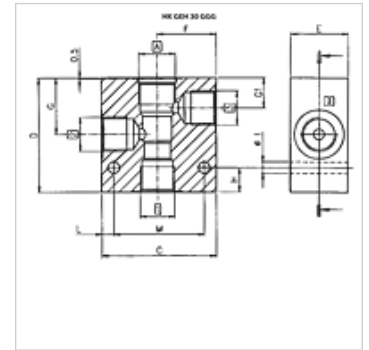

Artikal

Naziv	Otvor za ventil	A	Priključak1,3	Priključak 3	C	D	E	F	G	G1	H	I	L	M	Težina
					(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
HK GEH 38 C0830 GGG	C0830	UNF 3/4"	G 3/8"	G 3/8"	60	65	29	30,0	29,5	15,0	15	7	7,5	44	0,6
HK GEH 38 C1030 GGG	C1030	UNF 7/8"	G 3/8"	G 3/8"	70	75	39	35,5	34,5	18,5	15	7	7,5	54	1,2
HK GEH 12 C1230 GGG	C1230	UNF 1.1/16"	G 3/4"	G 1/2"	80	100	39	40,0	53,5	28,5	18	9	10,0	59	1,7

je oprema za sledeće proizvode

HK BFCV	3-kraki ventil za regulaciju protoka BFCV
HK PRRS	3-kraki ventili za smanjenje pritiska, PRRS