

PA 700 SF6 45 PLUS

Utična armatura, SFS W45°

HANSA FLEX

Osobine

Oblast primene Utična armatura za creva HD 700 PLUS

Priključak 1 SAE priključak priрубnice 6000 PSI

Oblik zaptivke 1 ravno zaptivanje sa SF O-prstenom

Skraćenica SFS


Norma SAE J518
ISO 6162-2

Uvezivanje sa osiguračem kidanja (interlock)

Obim isporuke Pritisna nazuvica + pritisni priključak

Materijal čelik

Površinska zaštita galvanska prevlaka

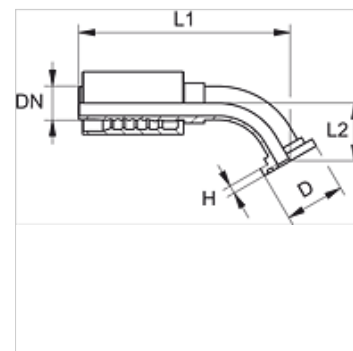

Artikal

| Naziv | DN | Veličina | col | Veličina spojnice | Radni pritisak (bar) | D (mm) | H (mm) | L1 (mm) | L2 (mm) |
|-------------------------|----|----------|--------|-------------------|----------------------|--------|--------|---------|---------|
| PA 720 SF6 45 PLUS | 19 | 12 | 3/4" | 3/4" | 420,0 | 41,3 | 8,8 | 152,9 | 40,0 |
| PA 720 SF6 25 45 PLUS | 19 | 12 | 3/4" | 1" | 420,0 | 47,6 | 9,6 | 144,9 | 32,0 |
| PA 725 SF6 45 PLUS | 25 | 16 | 1" | 1" | 420,0 | 47,6 | 9,6 | 190,5 | 50,0 |
| PA 725 SF6 32 45 PLUS | 25 | 16 | 1" | 1.1/4" | 420,0 | 54,0 | 10,5 | 190,6 | 50,0 |
| PA 732 SF6 45 PLUS | 31 | 20 | 1.1/4" | 1.1/4" | 420,0 | 54,0 | 10,5 | 211,0 | 60,0 |
| PA 732 SF6 45 L 39 PLUS | 31 | 20 | 1.1/4" | 1.1/4" | 420,0 | 54,0 | 10,5 | 211,0 | 39,0 |
| PA 740 SF6 45 PLUS | 38 | 24 | 1.1/2" | 1.1/2" | 420,0 | 63,5 | 12,6 | 273,0 | 80,0 |
| PA 740 SF6 45 L 70 PLUS | 38 | 24 | 1.1/2" | 1.1/2" | 420,0 | 63,5 | 12,6 | 263,0 | 70,0 |
| PA 750 SF6 45 PLUS | 51 | 32 | 2" | 2" | 420,0 | 79,4 | 12,6 | 297,6 | 69,0 |