

# FI ND E MA

Element filtera za filter niskog pritiska MA

**HANSA FLEX**


## Osobine

Temperatura min. -25 °C

Temperatura max. 120 °C

Materijal Zaptivka: NBR

Radni pritisak maks. 10 bara

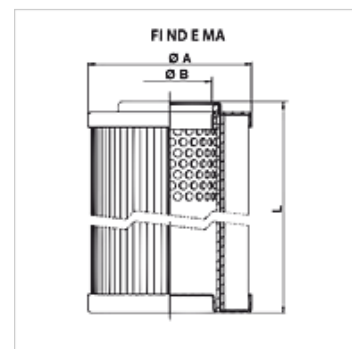

## Artikal

| Naziv                | Filterska jedinica (µm) | Površina filtera (cm <sup>2</sup> ) | Qmax (L/min) | Filter material | L (mm) | Ø A (mm) | Ø B (mm) | Težina (kg) |
|----------------------|-------------------------|-------------------------------------|--------------|-----------------|--------|----------|----------|-------------|
| FI ND E MA 0093 A03  | 3,0                     | 590                                 | 15           | neorganski      | 93,0   | 47,0     | 25,5     | 0,20        |
| FI ND E MA 0030 P25  | 25,0                    | 1824                                | 80           | organic         | 178,0  | 58,0     | 32,2     | 0,27        |
| FI ND E MA 0025 M60  | 60,0                    | 1575                                | 150          | Žičano pletivo  | 142,0  | 83,2     | 47,5     | 0,52        |
| FI ND E MA 0050 A03  | 3,0                     | 4020                                | 200          | neorganski      | 249,0  | 78,5     | 40,3     | 0,72        |
| FI ND E MA 0050 A06  | 6,0                     | 4020                                | 200          | neorganski      | 249,0  | 78,5     | 40,3     | 0,72        |
| FI ND E MA 0050 A10  | 10,0                    | 4020                                | 200          | neorganski      | 249,0  | 78,5     | 40,3     | 0,72        |
| FI ND E MA 0060 M100 | 100,0                   | 4280                                | 300          | Žičano pletivo  | 265,5  | 83,2     | 47,5     | 0,98        |
| FI ND E MA 0040 M60  | 60,0                    | 2000                                | 330          | Žičano pletivo  | 210,0  | 140,0    | 51,0     | 0,79        |
| FI ND E MA 0045 P03  | 3,0                     | 10000                               | 350          | organic         | 221,5  | 152,0    | 88,0     | 0,60        |
| FI ND E MA 0100 M40  | 40,0                    | 6370                                | 450          | Žičano pletivo  | 372,0  | 83,2     | 47,5     | 0,98        |
| FI ND E MA 0100 M60  | 60,0                    | 4410                                | 450          | Žičano pletivo  | 372,0  | 83,2     | 47,5     | 1,42        |
| FI ND E MA 0463 A03  | 3,0                     | 10650                               | 350          | neorganski      | 463,0  | 106,0    | 72,0     | 0,95        |
| FI ND E MA 0463 A06  | 6,0                     | 10650                               | 400          | neorganski      | 463,0  | 106,0    | 72,0     | 0,95        |
| FI ND E MA 0463 A10  | 10,0                    | 10650                               | 450          | neorganski      | 463,0  | 106,0    | 72,0     | 0,95        |

Qmax - maks. volumen protoka – Filter FI ND E MA 0050 \*\*\* za sistem sporednog filterskog voda NSFA tip D – Filter FI ND E MA 0463 \*\*\* za sistem sporednog filterskog voda NSFA tip E

## je rezervni deo za sledeće proizvode

NSFA Typ D Sistem sporednog filterskog voda, tip D

NSFA Typ E Sistem sporednog filterskog voda, tip E