

# FI ND E UF

Element filtera za filter niskog pritiska UF

**HANSA FLEX**


## Osobine

Temperatura min. -25 °C

Temperatura max. 120 °C

Materijal Zaptivka: NBR

Radni pritisak maks. 10 bara

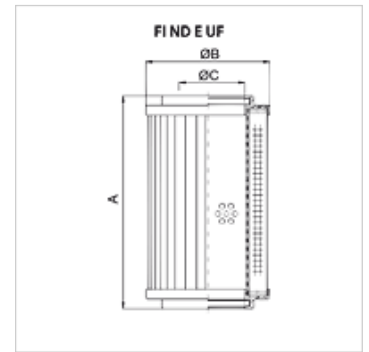

## Artikal

| Naziv               | Filterska jedinica (µm) | Površina filtera (cm <sup>2</sup> ) | Filter material         | A (mm) | Ø B (mm) | Ø C (mm) | Težina (kg) |
|---------------------|-------------------------|-------------------------------------|-------------------------|--------|----------|----------|-------------|
| FI ND E UF 0010 A03 | 3,0                     | 3260                                | neorgansko fiber staklo | 210,0  | 99,0     | 51,5     | 1,00        |
| FI ND E UF 0010 A06 | 6,0                     | 3260                                | neorgansko fiber staklo | 210,0  | 99,0     | 51,5     | 1,00        |
| FI ND E UF 0011 A10 | 10,0                    | 3260                                | neorgansko fiber staklo | 210,0  | 99,0     | 51,5     | 0,58        |

for Bypass flow filter system NSF A Typ C

## je rezervni deo za sledeće proizvode

NSFA Typ C Sistem sporednog filterskog voda, tip C