

# FI ND E UF

Element filtera za filter niskog pritiska UF

**HANSA FLEX**


## Osobine

Temperatura min. -25 °C

Temperatura max. 120 °C

Materijal Zaptivka: NBR

Radni pritisak maks. 10 bara

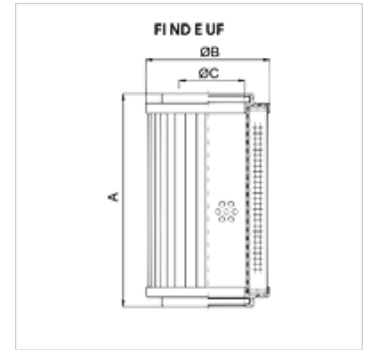

## Artikal

Naziv	Filterska jedinica (µm)	Površina filtera (cm <sup>2</sup> )	Filter material	A (mm)	Ø B (mm)	Ø C (mm)	Težina (kg)
FI ND E UF 0010 A03	3,0	3260	neorgansko fiber staklo	210,0	99,0	51,5	1,00
FI ND E UF 0010 A06	6,0	3260	neorgansko fiber staklo	210,0	99,0	51,5	1,00
FI ND E UF 0011 A10	10,0	3260	neorgansko fiber staklo	210,0	99,0	51,5	0,58

for Bypass flow filter system NSF A Typ C

## je rezervni deo za sledeće proizvode

NSFA Typ C Sistem sporednog filterskog voda, tip C