

FI ND E UF

Element filtra za filter niskog pritiska UF

HANSA FLEX


Osobine

Temperatura min. -25 °C

Temperatura max. 120 °C

Materijal Zaptivka: NBR

Radni pritisak maks. 10 bara

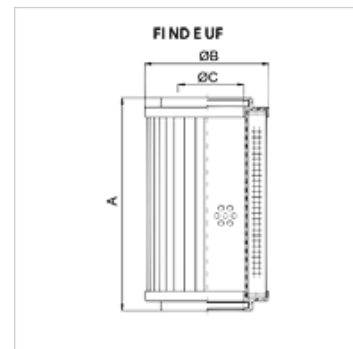

Artikal

| Naziv | Filterska jedinica (µm) | Površina filtra (cm ²) | Filter material | A (mm) | Ø B (mm) | Ø C (mm) | Težina (kg) |
|---------------------|-------------------------|------------------------------------|-------------------------|--------|----------|----------|-------------|
| FI ND E UF 0010 A03 | 3,0 | 3260 | neorgansko fiber staklo | 210,0 | 99,0 | 51,5 | 1,00 |
| FI ND E UF 0010 A06 | 6,0 | 3260 | neorgansko fiber staklo | 210,0 | 99,0 | 51,5 | 1,00 |
| FI ND E UF 0011 A10 | 10,0 | 3260 | neorgansko fiber staklo | 210,0 | 99,0 | 51,5 | 0,58 |

for Bypass flow filter system NSF A Typ C

je rezervni deo za sledeće proizvode

NSFA Typ C Sistem sporednog filterskog voda, tip C