

# FI SP R 1

Spin-On filter povratnog voda tipa 1

**HANSA FLEX**

## Osobine

**Verzija** sa bajpas ventilom 1,75 bar


**Temperatura min.** -25 °C

**Temperatura max.** 110 °C

**Materijal** Filter head in aluminum  
Zaptivka: NBR

**Radni pritisak** maks. 12 bara

**Filterska jedinica** 10 µm

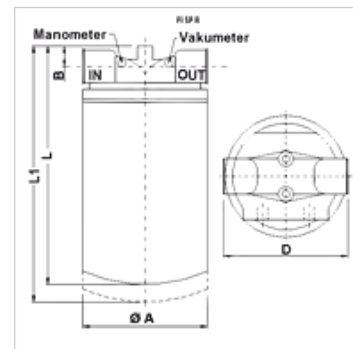

## Napomena

For utilization as a suction filter a suction filter head FI SP S FK \*\*\* must be used.

## Opis

Spin-On filter za ugradnju u cevovodu

Diferencijalni pritisak za papirni (P) elemenat filtera maks. 4 bar

Diferencijalni pritisak za neorganski elemenat filtera (A) maks. 4 bar

Konstruisano (Qmax.) za medijum u skladu sa standardom ISO VG 46 pri 50°C (30 mm<sup>2</sup>/s) na Δp<sub>ges</sub> = 0,4 bar

## Napomene u vezi porudžbine

ostali materijali za filtriranje kao i filteri za ostale vrste ulja, viskoziteta ili temperatura mogu se isporučiti na zahtev

## Artikal

Naziv	Površina filtera (cm <sup>2</sup> )	Filter material	Priključak voda	Q max. (L/min)	B (mm)	D (mm)	Ø A (mm)	L (mm)	L1 (mm)	Težina (kg)
FI SP R 48 A10 V G3/4	1900	neorganski	G 3/4"	48	22	95	96,0	180,0	200,0	1,0
FI SP R 55 P10 V G3/4	2240	organic	G 3/4"	55	22	95	96,0	180,0	200,0	1,0
FI SP R 53 A10 V G3/4	3160	neorganski	G 3/4"	53	22	95	96,0	248,0	268,0	1,3
FI SP R 58 P10 V G3/4	4140	organic	G 3/4"	58	22	95	96,0	248,0	268,0	1,3
FI SP R 110 A10 V G11/4	3950	neorganski	G 1.1/4"	110	30	133	129,0	241,0	266,0	2,2
FI SP R 130 P10 V G11/4	4300	organic	G 1.1/4"	130	30	133	129,0	241,0	266,0	2,2
FI SP R 115 A10 V G11/4	5390	neorganski	G 1.1/4"	115	30	133	129,0	286,0	311,0	2,3
FI SP R 150 P10 V G11/4	5760	organic	G 1.1/4"	150	30	133	129,0	286,0	311,0	2,3

Qmax - maks. volumen protoka

## Pribor

HK VA MAN Clogging indicator pressure gauge

## Rezervni delovi

FI SP E MP Elemenat filtera za Spin-On filter MP

FI SP R/S FK Glava filtera za Spin-On filter povratnog voda / usisni filter