
K-INLINE-DRG AG IG O SEKUNDAERENTLU

Inline pressure regulators, non-self-relieving

Osobine

Radni pritisak	max. 18 bar
Temperaturni opseg	0 °C to +60 °C
Tolerancija pritiska	± 0.3 bar at 10 l/min
Kućište	Zinc
ostali delovi	Brass, NBR, stainless steel



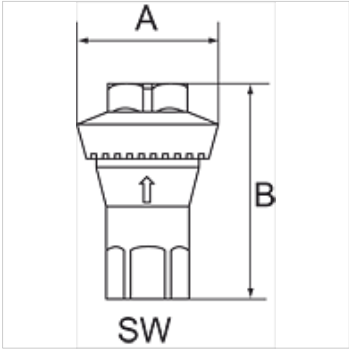

Napomena

Ostali podaci na upit.

Opis

This single-acting diaphragm regulator can be installed in any pneumatic system. Since the pressure is preset in the factory and cannot be altered, the product is also tamper-proof. We recommend mounting the regulator directly on the tool to make sure the correct pressure is applied. In this case, the tool is never stressed by the higher pressure of the supply system and is protected against pressure fluctuations in hoses, pipes, etc. Energy efficiency and economic efficiency can be achieved by using an inline pressure regulator.

Artikal

Naziv	Navoj	Unapred podešeni radni pritisak	A (mm)	B	SW (mm)
K- 07 25 02 75	G 1/4	1 bar	34,0	52,0 mm	17
K- 07 25 02 76	G 1/4	2 bar	34,0	52,0 mm	17
K- 07 25 02 77	G 1/4	3 bar	34,0	52,0 mm	17
K- 07 25 02 78	G 1/4	4 bar	34,0	52,0 mm	17
K- 07 25 02 79	G 1/4	5 bar	34,0	52,0 mm	17
K- 07 25 02 80	G 1/4	6 bar	34,0	52,0 mm	17
K- 07 25 02 81	G 1/4	6,5 bar	34,0	52,0 mm	17
K- 07 25 02 82	G 1/4	7 bar	34,0	52,0 mm	17

Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.