


# K-INLINE-DRG AG IG O SEKUNDAERENTLU

Inline pressure regulators, non-self-relieving

**HANSA FLEX**

## Osobine

|                      |                             |
|----------------------|-----------------------------|
| Radni pritisak       | max. 18 bar                 |
| Temperaturni opseg   | 0 °C to +60 °C              |
| Tolerancija pritiska | ± 0.3 bar at 10 l/min       |
| Kučíšte              | Zinc                        |
| ostali delovi        | Brass, NBR, stainless steel |

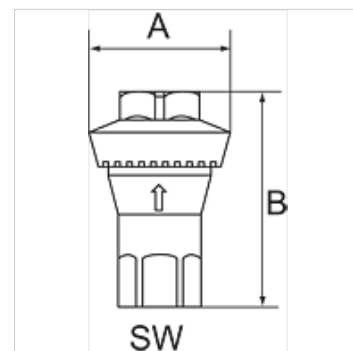

## Napomena

Ostali podaci na upit.

## Opis

This single-acting diaphragm regulator can be installed in any pneumatic system. Since the pressure is preset in the factory and cannot be altered, the product is also tamper-proof. We recommend mounting the regulator directly on the tool to make sure the correct pressure is applied. In this case, the tool is never stressed by the higher pressure of the supply system and is protected against pressure fluctuations in hoses, pipes, etc. Energy efficiency and economic efficiency can be achieved by using an inline pressure regulator.

## Artikal

| Naziv          | Navoj | Unapred podešeni radni pritisak | A<br>(mm) | B       | SW<br>(mm) |
|----------------|-------|---------------------------------|-----------|---------|------------|
| K- 07 25 02 75 | G 1/4 | 1 bar                           | 34,0      | 52,0 mm | 17         |
| K- 07 25 02 76 | G 1/4 | 2 bar                           | 34,0      | 52,0 mm | 17         |
| K- 07 25 02 77 | G 1/4 | 3 bar                           | 34,0      | 52,0 mm | 17         |
| K- 07 25 02 78 | G 1/4 | 4 bar                           | 34,0      | 52,0 mm | 17         |
| K- 07 25 02 79 | G 1/4 | 5 bar                           | 34,0      | 52,0 mm | 17         |
| K- 07 25 02 80 | G 1/4 | 6 bar                           | 34,0      | 52,0 mm | 17         |
| K- 07 25 02 81 | G 1/4 | 6,5 bar                         | 34,0      | 52,0 mm | 17         |
| K- 07 25 02 82 | G 1/4 | 7 bar                           | 34,0      | 52,0 mm | 17         |