
K-SCHL-AUFROLLER LUFT H

Hose reels for compressed air, high flow capacity

Osobine

Materijal creva	Braided polyurethane
Radni pritisak	maks. 12 bara
Radna temperatura	-20 °C to +60 °C
Obrtni ugao	300°



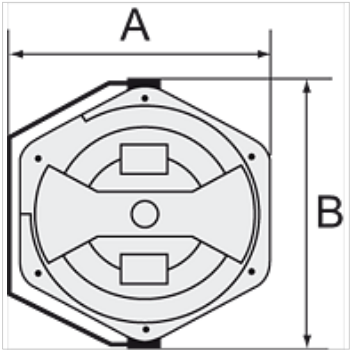

Napomena

Ostali podaci na upit.

Opis

Specially designed to ensure a high flow capacity. Easy mounting on the wall or ceiling. Closed, rugged, impact-resistant housing made of POM, supply/outlet R 1/4 male thread and lightweight, hard-wearing, oil-resistant polyurethane hose. Incl. 2 m feeder hose.

Artikal

Naziv	Mera creva	A (mm)	B (mm)	Dužina creva (m)
K- 07 10 06 14	16 mm x 11 mm	394,5	436,0	10

Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.