
K-INLINE-EJEKTTOREN VR

Inline ejectors »VR«, screw connection

Osobine

Osobine	Vacuum generator with high maximum vacuum level (85% vacuum) No moving parts, which means no wear and no maintenance ultra small footprint, suitable for confined spaces minimal air consumption \nlow noise
Primena	by screwing / plugging into the distribution beam direct attachment to the suction pad for handling various workpieces
Kućište	Aluminium eloxed (type VR)
Sistem dizni	Brass (type VR)
Priključak	Utični priključak



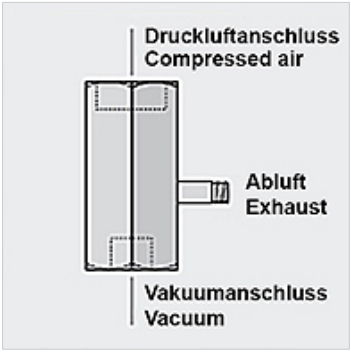

Napomena

Ostali podaci na upit.

Opis

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

Artikal

Naziv	Veličina dizne	Priključak odlaznog vazduha	Priključak za komprimovani vazduh	Vakuumski priključak	Stepen evakuacije	Potrošnja vazduha usisa (L/min)	maks. sposobnost usisavanja (L/min)	Dužina (mm)	Radni pritisak (bar)
K- 07 45 01 29	0,7	M 5 male	G 1/4 IG	G1/8 female	90 %	21,0	14,0	35,0	5,0
K- 07 45 01 30	0,9	M 5 male	G 1/4 IG	G1/8 female	89 %	36,0	21,0	35,0	5,0

Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.