


K-KOMPAKTEJEKTOREN MINI

Mini-compact ejectors

HANSA FLEX

Osobine

Osobine Vacuum generator with integrated control valves and system monitoring functions
Gripping and blowing off can be controlled without the need for external valves
Optimised air consumption thanks to many models with differing suction capacities
Minimum energy costs in continuous operation
Easy adjustment with foil keypad, LED display of the settings
Minimum size and low weight
Optimum vacuum generation directly on the suction pad
Complete solution for very simple installation
Short learning curve thanks to "teach" function
No need for additional sensors
Easily visible status indication

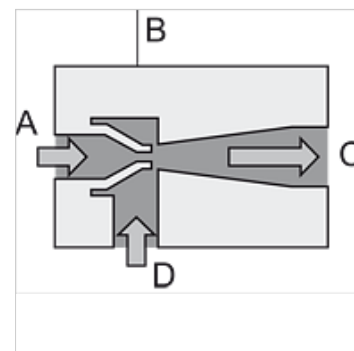

| | |
|--------------------------|---|
| Primena | Ideal where space is restricted and for highly dynamic movements, handling with industrial robots, linear axes pick-and-place systems |
| Stepen evakuacije | 85 % |
| Osnovno telo | Anodised aluminium |
| Integrirano | NC blow-off valve, filter, silencer, non-return valve |

Napomena

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy. Ostali podaci na upit.

Opis

Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Dodatne informacije

Important: Order two connection plugs per ejector.

Artikal

| Naziv | Veličina dizne | Položaj mirovanja ventila za usisavanje | Priključak za komprimovani vazduh | Vakuumski priključak | Potrošnja vazduha usisa (L/min) | maks. sposobnost usisavanja (L/min) | Dimenzije | Radni pritisak (bar) |
|----------------|----------------|---|-----------------------------------|----------------------|---------------------------------|-------------------------------------|---------------------|----------------------|
| K- 07 45 01 46 | 1,0 | NC | M 5 IG | M5 female | 46,0 | 23,0 | 65mm x 10mm x 107mm | 4,5 |
| K- 07 45 01 45 | 1,0 | NO | M 5 IG | M5 female | 46,0 | 23,0 | 65mm x 10mm x 107mm | 4,5 |

Pribor

| | |
|-----------------------------|-------------------------------------|
| K-ANSCHLUSSSTECK MAGNETVE 1 | Connection plug for solenoid valves |
| K-ERSATZSCHALLDAEMPFER | Replacement silencers |
| K-ERSATZFILTERELEMENTE 1 | Replacement filter element |