

K-SAUGPLATTENAUFHAENGUNG

Flexible suction pad mountings

Osobine

Primena	For handling of workpieces with sloping using large-area vacuum gripper Handling of large plates that can sag when lifting In combination with spring plungers to compensate height-differences and Uneveness
Posebne karakteristike	very good adaptation to oblique workpiece surfaces automatic Rückstellung in die Ausgangslage vacuum-tight design with integrated protection against damage

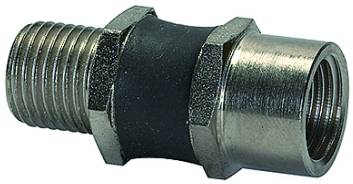

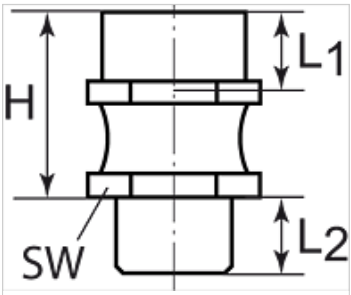

Napomena

Ostali podaci na upit.

Opis

Flexible suction pad mounting. By flexing in all directions, this mounting allows the suction pad to better adapt itself to sloping workpieces.

Artikal

Naziv	Navoj 1 unutrašnji	Navoj 2 spoljni	H (mm)	Materijal	L1 (mm)	L2 (mm)	Ugao W (°)	Vertikalno opterećenje (N/m2)	Moment savijanja (N/m2)	SW (mm)
K- 07 45 01 47	G 1/4	M 10 x 1.25	27,0	Steel, rubber	10,5	8,0	12	500	8,0	17
K- 07 45 01 48	G 1/4	G 1/4	27,0	Steel, rubber	12,0	12,0	12	750	10,0	17

Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.