

K-SAUGPLATTENAUFHAENGUNG


Flexible suction pad mountings

HANSA FLEX

Osobine

Primena For handling of workpieces with sloping using large-area vacuum gripper
Handling of large plates that can sag when lifting
In combination with spring plungers to compensate height-differences and Unevenness

Posebne karakteristike very good adaptation to oblique workpiece surfaces
automatic Rückstellung in die Ausgangslage
vacuum-tight design with integrated protection against damage

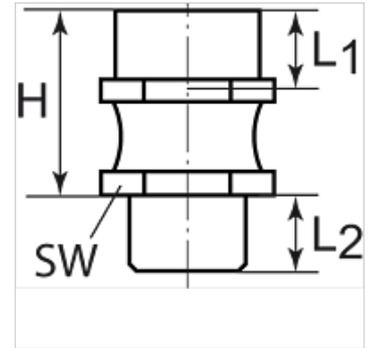

Napomena

Ostali podaci na upit.

Opis

Flexible suction pad mounting. By flexing in all directions, this mounting allows the suction pad to better adapt itself to sloping workpieces.

Artikal

Naziv	Navoj 1 unutrašnji	Navoj 2 spoljni	H (mm)	Materijal	L1 (mm)	L2 (mm)	Ugao W (°)	Vertikalno opterećenje (N/m ²)	Moment savijanja (N/m ²)	SW (mm)
K- 07 45 01 47	G 1/4	M 10 x 1.25	27,0	Steel, rubber	10,5	8,0	12	500	8,0	17
K- 07 45 01 48	G 1/4	G 1/4	27,0	Steel, rubber	12,0	12,0	12	750	10,0	17