
K-VAKUUMSCHALTER
Vacuum switch

HANSA-FLEX

Osobine

Priključak medija za merenje	G 1/8 male and M 5 female
Izlazni signal	Analogue: 1 to 5 V
Priključak na električnu mrežu	Male connector M8, four pin
Histereza	Adjustable: 3 to 25% of set value
Mediji	Non-aggressive gases. dry, oil-free air
Uključna funkcija	PNP
Sposobnost komutacije	125 mA
Potrošnja struje	30 mA
Temperaturni opseg	0 - 50 °C
Kućište	Polycarbonate



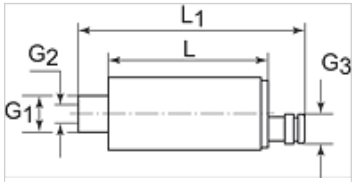

Napomena

Ostali podaci na upit.

Opis

Universal electronic vacuum switch for safety monitoring, optimisation of cycle times and regulation circuits. Its small size and low weight permit installation directly on the suction pad.
Switching point and hysteresis adjustable with a screw. Integrated LED for indication of the switching state.

Artikal

Naziv	G1 spolja	G2 unutra	G3 spolja	L (mm)	L1 (mm)	Merni opseg	Napon
K- 07 45 01 58	G 1/8	M 5	M 8 x 1	44,0	62,0	-1 bis 0 bar	10.8 - 30 V DC

Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.