


# K-VAKUUMSENSOR DIGITAL

Vacuum sensor, digital

**HANSA FLEX**

## Osobine

|                           |   |
|---------------------------|---|
| <b>Primena</b>            | Measurement of vacuum values close to the suction pad<br>Remote evaluation of the signals<br>Processing the output signals, for example, by PLC |
| <b>Mediji</b>             | dry, oil-free air and non-aggressive gases  |
| <b>Temperaturni opseg</b> | 0 - 50 °C   |
| <b>Izlazni signal</b>     | 1 to 5 analogous to V   |
| <b>Histereza</b>          | Fixed: 20 mbar (model with digital sensor)  |
| <b>Dužina kabla</b>       | 3 m   |
| <b>Vrsta zaštite</b>      | IP 40   |

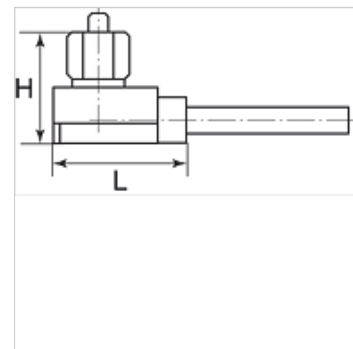

## Napomena

Ostali podaci na upit.

## Opis

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy.

## Artikal

| Naziv          | Priključak | H<br>(mm) | L<br>(mm) | Merni opseg  | Napon        |
|----------------|------------|-----------|-----------|--------------|--------------|
| K- 07 45 01 57 | M 5 male   | 16,9      | 21,0      | -1 bis 0 bar | 10 - 24 V DC |