
K-DRS ELK GERAETESTECKER

Pressure switches, connection with plug connector, type A acc. to DIN 43650

Osobine

Oblast primene	Pneumatic applications
Učestalost komutacije	200/min.
Napon komutacije	max. 250 V AC / 28 V DC
Vrsta zaštite	IP 65 (DIN 43650), IP 67 (M 12 x 1)
Temperaturni opseg	-10 °C to +80 °C
Poklopac za podešavanje	Aluminium, powder-coated
Kućište	Special die-cast material
Membrana, zaptivka	NBR



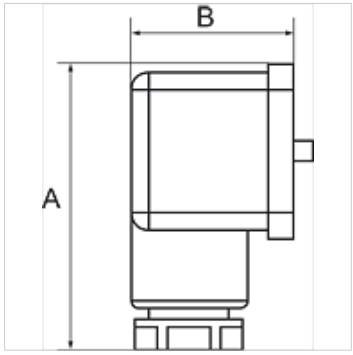

Napomena

Ostali podaci na upit.

Opis

For converting pneumatic to electrical signals. Designed for use in rough vacuum applications (technical vacuum). Universal switch type, suitable as NC, NO or changeover contact. These devices are free from paint-wetting impairment substances (PWIS).

Artikal

Naziv	Priključak	Opseg podešavanja	A (mm)	B (mm)
K- 07 30 28 45	G 1/4	0,2 - 2,0 bar	48,0	28,0
K- 07 30 28 46	G 1/4	0,5 - 8,0 bar	48,0	28,0
K- 07 30 28 47	G 1/4	1,0 - 16,0 bar	48,0	28,0

Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.