

# K-BKR EINTEILIG VA

Ball valves

## Osobine

| | |
|---|---|
| **Radni pritisak** | max. 55 bar (depending on connection size and temperature) |
| **Radna temperatura** | Max. 150 °C |
| **Zaptivka** | PTFE |
| **Ručna poluga** | Stainless steel 1.4301 |

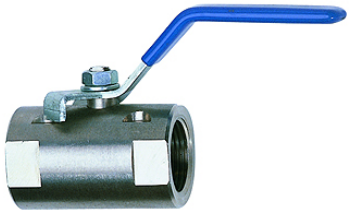

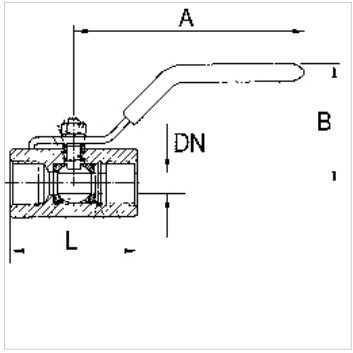


## Napomena

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)
Ostali podaci na upit.

## Opis

Full bore with G 1/4 to G 3/8, reduced bore with G 1/2 to G 2

## Napomene u vezi porudžbine

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

## Artikal

| Naziv | DN | Navoj | A (mm) | B (mm) | L (mm) | Materijal |
|---|---|---|---|---|---|---|
| **K- 07 30 14 94** | 5 | G 1/4 | 60,0 | 30,0 | 39,8 | Stainless steel 1.4401/1.4408 |
| **K- 07 30 14 95** | 7 | G 3/8 | 80,0 | 33,0 | 44,8 | Stainless steel 1.4401/1.4408 |
| **K- 07 30 14 96** | 9 | G 1/2 | 110,0 | 57,0 | 56,5 | Stainless steel 1.4401/1.4408 |
| **K- 07 30 14 97** | 13 | G 3/4 | 110,0 | 61,0 | 60,0 | Stainless steel 1.4401/1.4408 |
| **K- 07 30 14 98** | 15 | G 1 | 124,0 | 70,0 | 70,0 | Stainless steel 1.4401/1.4408 |
| **K- 07 30 14 99** | 20 | G 1 1/4 | 152,0 | 75,0 | 77,6 | Stainless steel 1.4401/1.4408 |
| **K- 07 30 15 00** | 25 | G 1 1/2 | 150,0 | 80,0 | 87,0 | Stainless steel 1.4401/1.4408 |
| **K- 07 30 15 01** | 32 | G 2 | 155,0 | 85,0 | 102,0 | Stainless steel 1.4401/1.4408 |

*Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.*