



# K-BKR ECKFORM IG AG AUS

Ball valves, angle type, female/male thread (male thread on side)

**HANSA FLEX**

## Osobine

<b>Oblast primene</b>	Gas, compressed air, water, oil, weak alkaline solutions
<b>Radni pritisak</b>	Liquids: 40/32 bar depending on the port size; Gas: max. 5 bar (MOP 5)
<b>Radna temperatura</b>	-15 °C to +100 °C for liquids; -15 °C to +60 °C for gas
<b>Opis navoja</b>	R or Rp thread acc. to ISO 7-1
<b>Kućište, unutrašnji delovi</b>	Nickel-plated brass
<b>Poluga</b>	Aluminium, painted yellow
<b>Zaptivka kugle</b>	PTFE
<b>Zaptivka vretena</b>	NBR

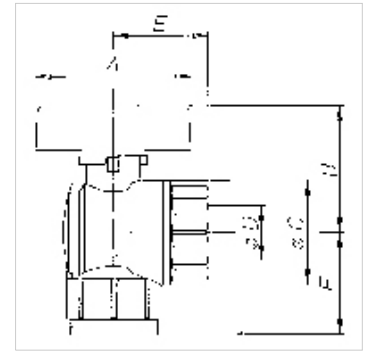

## Napomena

Ostali podaci na upit.

## Artikal

Naziv	DN	Navoj	PN (bar)	A (mm)	B (mm)	Ø C (mm)	E (mm)	F (mm)
K- 07 30 20 27	15	R/Rp 1/2	40	47,0	37,0	31,0	37,0	33,0
K- 07 30 20 28	20	R/Rp 3/4	40	56,0	46,0	38,9	43,0	38,0
K- 07 30 20 29	25	R/Rp 1	40	56,0	50,0	48,0	51,0	46,0