



# K-S-BKR M ENTL

Safety ball valves

**HANSA FLEX**

## Osobine

|  |                           |
|--|---------------------------|
| Radna temperatura                        | 0 °C to +60 °C            |
| Opis navoja                              | Rp thread acc. to ISO 7-1 |
| Zapivni materijal                        | PTFE                      |
| Kućište, kugla, vreteno, zaustavna čaura | Nickel-plated brass       |
| Ručna poluga                             | Die-cast aluminium, black |
| Materijal                                | sealing: PTFE             |

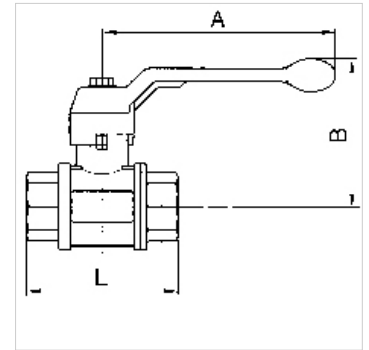

## Napomena

Ostali podaci na upit.

## Opis

2/2-way brass safety ball valves. Specially designed for pneumatic applications. The ball valve shuts off the supply side and relieves the application into the atmosphere.

## Artikal

| Naziv          | DN | Navoj    | A<br>(mm) | B<br>(mm) | L<br>(mm) | maks. radni pritisak pri 20°C<br>(bar) |
|----------------|----|----------|-----------|-----------|-----------|--|
| K- 07 30 21 08 | 8  | Rp 1/4   | 100,0     | 61,0      | 52,0      | 12                                     |
| K- 07 30 21 09 | 10 | Rp 3/8   | 100,0     | 61,0      | 55,0      | 12                                     |
| K- 07 30 21 10 | 15 | Rp 1/2   | 100,0     | 64,0      | 69,0      | 12                                     |
| K- 07 30 21 11 | 20 | Rp 3/4   | 120,0     | 76,0      | 77,0      | 12                                     |
| K- 07 30 21 12 | 25 | Rp 1     | 120,0     | 80,0      | 89,0      | 12                                     |
| K- 07 30 21 13 | 32 | Rp 1 1/4 | 150,0     | 98,0      | 103,0     | 12                                     |
| K- 07 30 21 14 | 40 | Rp 1 1/2 | 150,0     | 104,0     | 114,0     | 12                                     |
| K- 07 30 21 15 | 50 | Rp 2     | 175,0     | 119,0     | 134,0     | 12                                     |