


K-BKR FEINEINSTELLUNG

Ball valves

HANSA FLEX

Osobine

Radni pritisak	Max. 40 bar
Radna temperatura	-15 °C to +100 °C
Opis navoja	G thread acc. DIN EN ISO 228-1
Kućište	Nickel-plated brass (outside); Brass with a bare metal surface (inside)
Ručni točak	Plastic
Kugla	Chrome-plated brass
Zaptivka kugle	PTFE
Zaptivka vretena	NBR

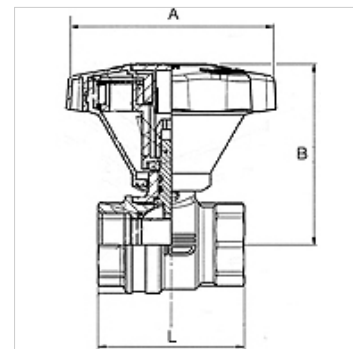

Napomena

Ostali podaci na upit.

Opis

Brass ball valves in the standard series with fine adjustment. Unlike our classic standard ball valves (open-close function), this model features a special stem technology that allows finely modulated opening and closing of the line. The flow rate can be regulated extremely precisely as a result. The cock is made of low-lead brass with a bare brass surface on the inside. It is thus safe to use with drinking water. This valve complies with the European standard EN 13828 and the working paper DVGW W 570.

Artikal

Naziv	DN	Navoj	A (mm)	B (mm)	L (mm)
K- 07 30 00 41	10	G 3/8	83,0	63,0	43,4
K- 07 30 00 42	15	G 1/2	83,0	70,0	50,1
K- 07 30 00 43	20	G 3/4	83,0	76,0	58,0
K- 07 30 00 44	25	G 1	83,0	80,0	68,8
K- 07 30 00 45	32	G 1 1/4	130,0	110,0	81,0
K- 07 30 00 46	40	G 1 1/2	130,0	116,0	93,2
K- 07 30 00 47	50	G 2	130,0	123,0	110,2