# K-3 BKR T DOPPELWIRKEND T1


Stainless steel ball valves, 3-way, with double-acting actuator, T-bore, normal position T1

HANSA FLEX

## Osobine

| | |
|---|---|
| **Konstrukcija** | Pneumatic actuators, in double- or single acting version, with integrated end-position feedback |
| **Otvor** | T oblik |
| **Radni pritisak** | max. 63 bar (depending on temperature and nominal size) |
| **Radna temperatura** | -20 °C to +70 °C |
| **Ugao obrtanja** | 90 ° |
| **Standardizovani međusklopovi** | Interface actuator / valve: four or eight threaded holes in the drive housing according to EN ISO 5211, Interface actuator / S |
| **Upravljački pritisak** | 5.5 bar |
| **Adapter ventila** | Acc. to NAMUR |
| **Pogon** | aluminium eloxed |
| **Zaptivka pogona** | NBR |
| **Kuglični ventil** | Stainless steel 1.4401,with ISO-flange plate |
| **Zaptivka kugličnog ventila** | PTFE/FKM |



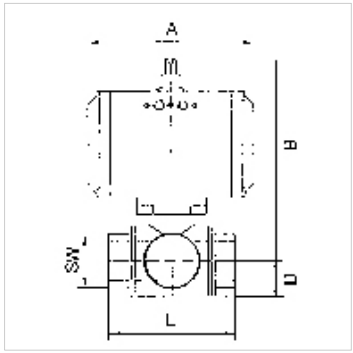


## Napomena

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)
Ostali podaci na upit.

## Opis

3-way cock, reduced bore

## Dodatne informacije

Other T-positions on request

## Artikal

| Naziv | DN | Navoj | Položaj | A (mm) | B (mm) | D (mm) | L (mm) | SW (mm) |
|---|---|---|---|---|---|---|---|---|
| **K- 07 30 02 99** | 15 | Rp 1/2 | T 1 | 116,0 | 130,0 | 20,0 | 73,0 | 27 |
| **K- 07 30 03 01** | 20 | Rp 3/4 | T 1 | 116,0 | 136,0 | 23,0 | 80,0 | 32 |
| **K- 07 30 03 03** | 25 | Rp 1 | T 1 | 133,0 | 148,5 | 28,5 | 90,0 | 41 |
| **K- 07 30 03 05** | 32 | Rp 1 1/4 | T 1 | 133,0 | 153,5 | 36,5 | 90,0 | 50 |
| **K- 07 30 03 07** | 40 | Rp 1 1/2 | T 1 | 137,0 | 173,0 | 37,0 | 105,0 | 55 |
| **K- 07 30 03 09** | 50 | Rp 2 | T 1 | 161,0 | 196,5 | 47,5 | 115,0 | 71 |

*Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.*