
# K-BKR STELLANTR E FEDER MS

Brass ball valves, single-acting actuator - spring to close

## Osobine

| | |
|---|---|
| **Konstrukcija** | Pneumatic actuators, in double- or single acting version, with integrated end-position feedback |
| **Radni pritisak** | max. 40 bar (to DN 32); max. 25 bar (from DN 40); max. 16 bar (from DN 65) |
| **Radna temperatura** | -20 °C to +70 °C |
| **Ugao obrtanja** | 90 ° |
| **Upravljački pritisak** | 5.5 bar |
| **Adapter ventila** | Supplied as standard |
| **Pogon** | aluminium eloxed |
| **Zaptivka pogona** | NBR |
| **Kuglični ventil** | Chrome-plated brass, with ISO-flange plate |
| **Zaptivka kugličnog ventila** | PTFE/FKM |
| **Upravljanje** | |



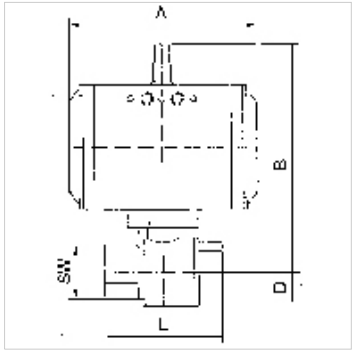


## Napomena

Ostali podaci na upit.

## Opis

2-way cock, full bore

## Artikal

| Naziv | DN | Navoj | A (mm) | B (mm) | D (mm) | L (mm) | SW (mm) |
|---|---|---|---|---|---|---|---|
| **K- 07 30 02 27** | 15 | Rp 1/2 | 133,0 | 142,0 | 17,0 | 75,0 | 26 |
| **K- 07 30 02 28** | 20 | Rp 3/4 | 133,0 | 145,0 | 20,0 | 80,0 | 32 |
| **K- 07 30 02 29** | 25 | Rp 1 | 133,0 | 148,0 | 25,0 | 90,0 | 41 |
| **K- 07 30 02 30** | 32 | Rp 1 1/4 | 137,0 | 173,0 | 30,0 | 110,0 | 50 |
| **K- 07 30 02 31** | 40 | Rp 1 1/2 | 137,0 | 180,0 | 36,0 | 120,0 | 55 |
| **K- 07 30 02 32** | 50 | Rp 2 | 180,0 | 203,0 | 45,0 | 140,0 | 70 |
| **K- 07 30 02 33** | 65 | Rp 2 1/2 | 209,0 | 230,0 | 57,0 | 155,0 | 83 |
| **K- 07 30 02 34** | 80 | Rp 3 | 209,0 | 242,0 | 68,0 | 182,0 | 98 |

*Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.*