



K-MV 3/2 230 V, 50 - 60 HZ

3/2-way solenoid valves, normally closed, directly operated, 230 V, 50 to 60 Hz

HANSA FLEX

Osobine

Priključak na električnu mrežu	For Pg 11P connector socket, acc. to ISO 4400
Vrsta zaštite	IP65 (with connector socket fitted)
Opis navoja	Rp thread acc. to ISO 7-1
Kućište, sedište ventila	Brass
Unutrašnji delovi	Stainless steel
Zaptivka	Perbunan (NBR)

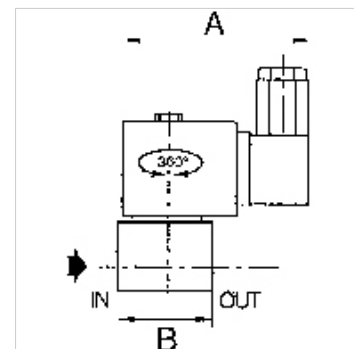

Napomena

Ostali podaci na upit.

Opis

For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Artikal

Naziv	Navoj	maks. radni pritisak (bar)	NW	A (mm)	B (mm)	Konstrukcija
K- 07 30 22 52	Rp 1/8	7	2,4	75,0	30,0	7
K- 07 30 22 53	Rp 1/4	6	3,2	80,0	43,0	10