


K-MV G Z 230 V, 50 - 60 HZ 1

Normally closed, combined operation, 230 V, 50 to 60 Hz

HANSA FLEX

Osobine

Priključak na električnu mrežu	ISO 4400. cable socket (Pg 11P)
Vrsta zaštite	IP65 (with connector socket fitted)
Temperatura medija	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Opis navoja	G-thread acc. to DIN EN ISO 228-1, Rp- thread acc. to ISO 7-1
Kućište, sedište ventila	Brass
Unutrašnji delovi	Stainless steel
Zaptivka	Perbunan (NBR) or FKM

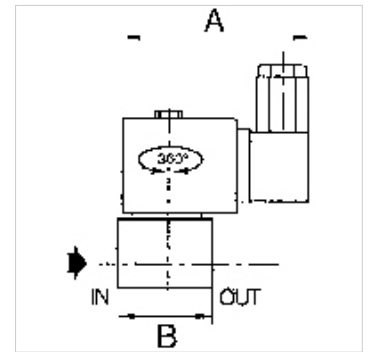

Napomena

Ostali podaci na upit.

Opis

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Artikal

Naziv	Navoj	maks. radni pritisak (bar)	NW	Zaptivni materijal	A (mm)	B (mm)	Konstrukcija
K- 07 30 22 84	Rp 3/8	9	16,0	NBR	80,0	70,0	3
K- 07 30 22 90	Rp 3/8	9	16,0	FKM	80,0	70,0	3
K- 07 30 22 85	Rp 1/2	9	16,0	NBR	80,0	70,0	3
K- 07 30 22 91	Rp 1/2	9	16,0	FKM	80,0	70,0	3
K- 07 30 22 86	Rp 3/4	9	19,0	NBR	80,0	70,0	3
K- 07 30 22 92	Rp 3/4	9	19,0	FKM	80,0	70,0	3
K- 07 30 22 87	Rp 1	9	25,0	NBR	86,0	95,0	3
K- 07 30 22 93	Rp 1	9	25,0	FKM	86,0	95,0	3
K- 07 30 22 88	Rp 1 1/4	9	28,0	NBR	86,0	95,0	3
K- 07 30 22 89	Rp 1 1/2	9	32,0	FKM	86,0	111,0	3