


# K-MV O D 230 V, 50 - 60 HZ 1

Normally open, directly operated, 230 V, 50 to 60 Hz

**HANSA FLEX**

## Osobine

Priključak na električnu mrežu	ISO 4400. cable socket (Pg 11P)
Vrsta zaštite	IP65 (with connector socket fitted)
Temperatura medija	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Opis navoja	G-thread acc. to DIN EN ISO 228-1, Rp- thread acc. to ISO 7-1
Kućište, sedište ventila	Brass
Unutrašnji delovi	Stainless steel
Zaptivka	Perbunan (NBR) or FKM

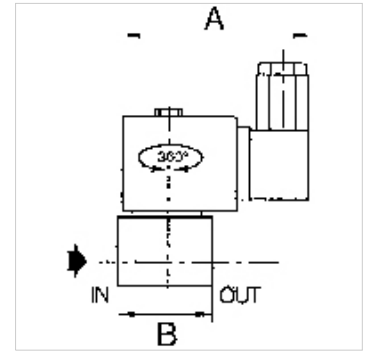

## Napomena

Ostali podaci na upit.

## Opis

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

## Artikal

Naziv	Navoj	maks. radni pritisak (bar)	NW	Zaptivni materijal	A (mm)	B (mm)	Konstrukcija
K- 07 30 23 62	Rp 1/8	20	2,4	NBR	75,0	33,0	7
K- 07 30 23 64	Rp 1/8	20	2,4	FKM	75,0	33,0	1
K- 07 30 23 63	G 1/4	9	3,2	NBR	80,0	40,0	2
K- 07 30 23 65	G 1/4	9	3,2	FKM	80,0	40,0	2