


# K-W45 STUECK IG IG RP-GEW

45° elbows, female-female, Rp thread acc. to ISO 7-1

**HANSA FLEX**

## Osobine

|                   |                                 |
|-------------------|---------------------------------|
| Radni pritisak    | maks. 20 bara                   |
| Radna temperatura | Max. 175 °C                     |
| Unutrašnji navoj  | Rp-thread acc. ISO 7-1          |
| Materijal         | Stainless steel 1.4401 / 1.4408 |

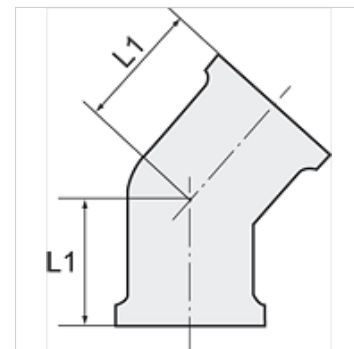

## Napomena

Ostali podaci na upit.

## Artikal

| Naziv          | Navoj  | L1<br>(mm) |
|----------------|--------|------------|
| K- 07 40 10 42 | Rp 1/8 | 15,6       |
| K- 07 40 10 43 | Rp 1/4 | 15,9       |
| K- 07 40 10 44 | Rp 3/8 | 17,6       |
| K- 07 40 10 45 | Rp 1/2 | 19,2       |
| K- 07 40 10 46 | Rp 3/4 | 22,8       |
| K- 07 40 10 47 | Rp 1   | 26,7       |