



# K-T-STUECKE IG AG IG 2

Tees, female-male-female

**HANSA FLEX**

## Osobine

|                   |                              |
|-------------------|------------------------------|
| Radni pritisak    | 60 bar                       |
| Radna temperatura | Max. 150 °C                  |
| Unutrašnji navoj  | Parallel to DIN EN ISO 228-1 |
| Materijal         | Mesing, niklovan             |
| Spoljni navoj     | conical acc. DIN 2999        |

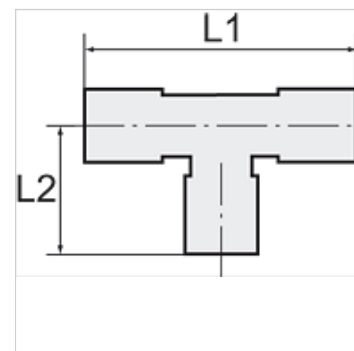

## Napomena

Ostali podaci na upit.

## Artikal

| Naziv          | Navoj   | L1<br>(mm) | L2<br>(mm) | SW    |
|----------------|---------|------------|------------|-------|
| K- 07 40 48 93 | M 5     | 22,0       | 11,5       | 9 mm  |
| K- 07 40 11 08 | G/R 1/8 | 42,0       | 18,5       | 10 mm |
| K- 07 40 11 09 | G/R 1/4 | 51,0       | 23,5       | 13 mm |
| K- 07 40 11 10 | G/R 3/8 | 56,0       | 26,0       | 17 mm |
| K- 07 40 11 11 | G/R 1/2 | 67,0       | 31,0       | 21 mm |
| K- 07 40 11 12 | G/R 3/4 | 73,0       | 33,0       | 25 mm |
| K- 07 40 11 13 | G/R 1   | 90,0       | 39,0       | 30 mm |