



# K-RD NIPPEL 6 KT

Reducing nipples, hexagonal

**HANSA FLEX**

## Osobine

|                  |                              |
|------------------|------------------------------|
| Radni pritisak   | Max. 20 bar                  |
| Spoljni navoj    | Parallel to DIN EN ISO 228-1 |
| Unutrašnji navoj | Parallel to DIN EN ISO 228-1 |
| Materijal        | Stainless steel 1.4408       |

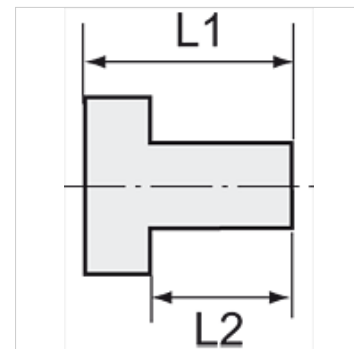

## Napomena

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.

Ostali podaci na upit.

## Artikal

| Naziv          | Spoljni navoj | Unutrašnji navoj | L1<br>(mm) | L2<br>(mm) | SW    |
|----------------|---------------|------------------|------------|------------|-------|
| K- 07 40 15 51 | G 1/4         | G 1/8            | 18,1       | 14,0       | 17 mm |
| K- 07 40 15 52 | G 3/8         | G 1/8            | 19,0       | 12,9       | 21 mm |
| K- 07 40 15 53 | G 3/8         | G 1/4            | 19,0       | 13,0       | 21 mm |
| K- 07 40 15 54 | G 1/2         | G 1/4            | 22,0       | 15,6       | 25 mm |
| K- 07 40 15 55 | G 1/2         | G 3/8            | 24,7       | 16,0       | 26 mm |
| K- 07 40 15 56 | G 3/4         | G 3/8            | 25,0       | 15,8       | 30 mm |
| K- 07 40 15 57 | G 3/4         | G 1/2            | 25,0       | 15,9       | 31 mm |
| K- 07 40 15 58 | G 1           | G 1/2            | 29,0       | 20,0       | 37 mm |
| K- 07 40 15 59 | G 1           | G 3/4            | 29,0       | 20,0       | 38 mm |
| K- 07 40 15 60 | G 1 1/4       | G 3/4            | 30,0       | 22,4       | 46 mm |
| K- 07 40 15 61 | G 1 1/4       | G 1              | 30,0       | 22,2       | 46 mm |
| K- 07 40 15 62 | G 1 1/2       | G 1              | 32,0       | 23,0       | 53 mm |
| K- 07 40 15 63 | G 1 1/2       | G 1 1/4          | 32,0       | 23,0       | 53 mm |
| K- 07 40 15 64 | G 2           | G 1              | 36,0       | 26,0       | 63 mm |
| K- 07 40 15 65 | G 2           | G 1 1/2          | 36,0       | 26,0       | 63 mm |