
K-SCHALLDAE SINTERBR IG

Silencers, sintered bronze, flat type with female thread

Osobine

Radni pritisak	maks. 10 bara
Radna temperatura	-10 °C to +250 °C
Norma	G thread acc. to DIN EN ISO 228-1



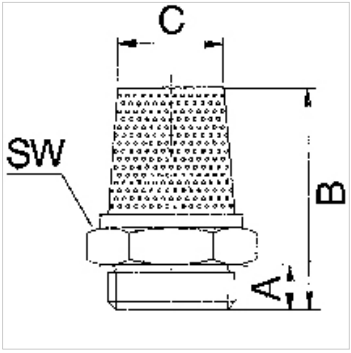

Napomena

Ostali podaci na upit.

Opis

For reducing the exhaust noise generated by pneumatic equipment.

Artikal

Naziv	Navoj	B (mm)	C (mm)	SW
K- 07 40 34 98	M 5	8,0	5,0	8 mm
K- 07 40 34 99	G 1/8	10,0	9,0	13 mm
K- 07 40 35 00	G 1/4	11,0	11,0	16 mm
K- 07 40 35 01	G 3/8	12,0	15,0	19 mm
K- 07 40 35 02	G 1/2	13,0	20,0	24 mm
K- 07 40 46 88	G 3/4	18,0	28,0	32 mm
K- 07 40 46 89	G 1	22,0	37,0	41 mm

Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.