

# K-TR AG-K MS NI

Male hose fittings, conical male thread - nickel-plated brass

## Osobine

| | |
|---|---|
| **Radna temperatura** | Max. 150 °C |
| **Pritisak** | Max. 60 bar |
| **Materijal** | Mesing, niklovan |



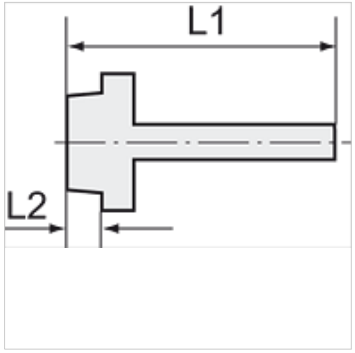


## Napomena

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Ostali podaci na upit.

## Opis

Suitable for air, water, oil, steam, etc.

## Dodatne informacije

Further types and dimensions on request.

## Artikal

| Naziv | Navoj | za crevo | L1 (mm) | L2 (mm) | SW |
|---|---|---|---|---|---|
| **K- 07 40 13 44** | R 1/8 | LW 6 mm | 31,5 | 8,0 | 12 mm |
| **K- 07 40 13 45** | R 1/8 | LW 8 mm | 31,5 | 8,0 | 12 mm |
| **K- 07 40 13 46** | R 1/8 | LW 9 mm | 31,5 | 8,0 | 12 mm |
| **K- 07 40 13 47** | R 1/8 | LW 10 mm | 32,5 | 8,0 | 12 mm |
| **K- 07 40 13 48** | R 1/4 | LW 6 mm | 35,0 | 11,0 | 14 mm |
| **K- 07 40 13 49** | R 1/4 | LW 8 mm | 35,0 | 11,0 | 14 mm |
| **K- 07 40 13 50** | R 1/4 | LW 9 mm | 35,0 | 11,0 | 14 mm |
| **K- 07 40 13 51** | R 1/4 | LW 10 mm | 36,0 | 11,0 | 14 mm |
| **K- 07 40 13 52** | R 1/4 | LW 12 mm | 36,0 | 11,0 | 14 mm |
| **K- 07 40 49 75** | R 1/4 | LW 13 mm | 39,5 | 11,5 | 14 mm |
| **K- 07 40 13 53** | R 3/8 | LW 9 mm | 35,5 | 11,5 | 17 mm |
| **K- 07 40 13 54** | R 3/8 | LW 10 mm | 36,5 | 11,5 | 17 mm |
| **K- 07 40 13 55** | R 3/8 | LW 12 mm | 36,5 | 11,5 | 17 mm |
| **K- 07 40 49 77** | R 3/8 | LW 13 mm | 41,0 | 13,0 | 17 mm |
| **K- 07 40 13 56** | R 1/2 | LW 9 mm | 38,5 | 14,0 | 22 mm |
| **K- 07 40 13 57** | R 1/2 | LW 10 mm | 39,5 | 14,0 | 22 mm |
| **K- 07 40 13 58** | R 1/2 | LW 12 mm | 39,5 | 14,0 | 22 mm |
| **K- 07 40 49 78** | R 1/2 | LW 13 mm | 44,5 | 15,5 | 22 mm |
| **K- 07 40 49 79** | R 1/2 | LW 16 mm | 44,5 | 15,5 | 22 mm |
| **K- 07 40 49 80** | R 1/2 | LW 19 mm | 44,5 | 15,5 | 22 mm |

*Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.*