

K-RD NIPPEL MS NI



Reducing nipples - nickel-plated brass

Osobine

Radna temperatura Max. 150 °C

Pritisak Max. 60 bar

Materijal Mesing, niklovan

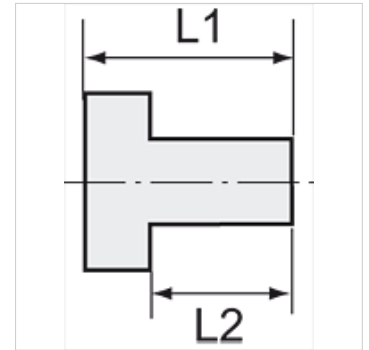

Napomena

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Ostali podaci na upit.

Opis

Suitable for air, water, oil, steam, etc.

Dodatne informacije

Further types and dimensions on request.

Artikal

| Naziv | Spoljni navoj | Unutrašnji navoj | L1 (mm) | L2 (mm) | SW |
|----------------|---------------|------------------|------------|------------|-------|
| K- 07 40 15 76 | G 1/8 | M 5 | 10,5 | 6,0 | 14 mm |
| K- 07 40 15 77 | G 1/4 | G 1/8 | 13,0 | 8,0 | 17 mm |
| K- 07 40 15 81 | G 3/8 | G 1/8 | 14,0 | 9,0 | 20 mm |
| K- 07 40 15 78 | G 3/8 | G 1/4 | 14,0 | 9,0 | 20 mm |
| K- 07 40 15 83 | G 1/2 | G 1/8 | 15,5 | 10,0 | 24 mm |
| K- 07 40 15 82 | G 1/2 | G 1/4 | 15,5 | 10,0 | 25 mm |
| K- 07 40 15 79 | G 1/2 | G 3/8 | 15,5 | 10,0 | 25 mm |
| K- 07 40 15 84 | G 3/4 | G 3/8 | 17,5 | 11,0 | 30 mm |
| K- 07 40 15 85 | G 3/4 | G 1/2 | 17,5 | 11,0 | 30 mm |
| K- 07 40 15 86 | G 1 | G 1/2 | 19,0 | 12,0 | 36 mm |
| K- 07 40 15 87 | G 1 | G 3/4 | 19,0 | 11,5 | 36 mm |