

K-RD NIPPEL LANG ES

Reducing nipples, long type

Osobine

Radni pritisak	Max. 20 bar
Materijal	plemeniti čelik 1.4571



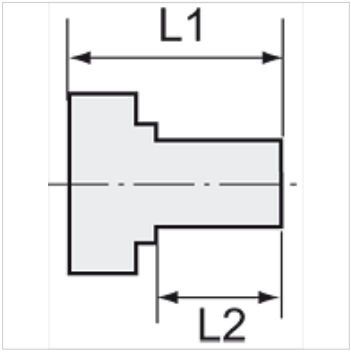

Napomena

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Ostali podaci na upit.

Dodatne informacije

Further types and dimensions on request.

Artikal

Naziv	Spoljni navoj	Unutrašnji navoj	L1 (mm)	L2 (mm)	SW
K- 07 40 15 38	M 5	M 5	16,0	5,5	10 mm
K- 07 40 15 39	M 5	G 1/8	17,0	5,0	14 mm
K- 07 40 15 43	G 1/8	G 1/8	23,0	8,0	14 mm
K- 07 40 15 40	G 1/8	G 1/4	26,0	10,0	17 mm
K- 07 40 15 44	G 1/4	G 1/8	28,0	10,0	17 mm
K- 07 40 15 45	G 1/4	G 1/4	28,0	10,0	17 mm
K- 07 40 15 41	G 1/4	G 3/8	26,0	10,0	19 mm
K- 07 40 15 46	G 3/8	G 1/4	29,0	10,0	19 mm
K- 07 40 15 47	G 3/8	G 3/8	29,0	10,0	19 mm
K- 07 40 15 42	G 3/8	G 1/2	27,0	12,0	24 mm
K- 07 40 15 48	G 1/2	G 3/8	34,0	12,0	24 mm
K- 07 40 15 49	G 1/2	G 1/2	34,0	12,0	24 mm
K- 07 40 15 50	G 1/2	G 3/4	38,0	13,0	32 mm

Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.