


K-SCHWENKTUELLE MS

Swivel hose fittings, parallel male thread

HANSA FLEX

Osobine

| | |
|---------------------|---|
| Radni pritisak | 10 bar |
| Temperatura medija | max. +90 °C |
| Temperatura okoline | Max. +90 °C |
| Materijal | Nickel-plated brass (banjo bolt), brass (ring nipple) |

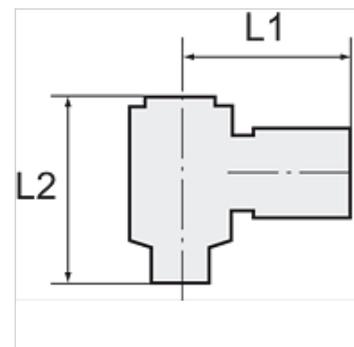

Napomena

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Ostali podaci na upit.

Dodatne informacije

Further types and dimensions on request.

Artikal

| Naziv | Navoj | za crevo | L1 (mm) | L2 (mm) | SW |
|----------------|-------|----------|------------|------------|-------|
| K- 07 40 34 39 | G 1/8 | LW 4 mm | 26,0 | 28,0 | 14 mm |
| K- 07 40 34 40 | G 1/8 | LW 6 mm | 26,0 | 28,0 | 14 mm |
| K- 07 40 34 41 | G 1/4 | LW 6 mm | 28,0 | 29,0 | 17 mm |
| K- 07 40 34 42 | G 1/4 | LW 9 mm | 28,0 | 30,5 | 17 mm |
| K- 07 40 34 43 | G 3/8 | LW 6 mm | 30,0 | 32,0 | 22 mm |
| K- 07 40 34 44 | G 3/8 | LW 9 mm | 30,0 | 32,0 | 22 mm |