

K-SCHWENKTUELLE MS

Swivel hose fittings, parallel male thread

Osobine

Radni pritisak	10 bar
Temperatura medija	max. +90 °C
Temperatura okoline	Max. +90 °C
Materijal	Nickel-plated brass (banjo bolt), brass (ring nipple)



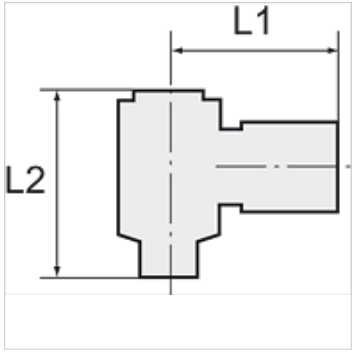

Napomena

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Ostali podaci na upit.

Dodatne informacije

Further types and dimensions on request.

Artikal

Naziv	Navoj	za crevo	L1 (mm)	L2 (mm)	SW
K- 07 40 34 39	G 1/8	LW 4 mm	26,0	28,0	14 mm
K- 07 40 34 40	G 1/8	LW 6 mm	26,0	28,0	14 mm
K- 07 40 34 41	G 1/4	LW 6 mm	28,0	29,0	17 mm
K- 07 40 34 42	G 1/4	LW 9 mm	28,0	30,5	17 mm
K- 07 40 34 43	G 3/8	LW 6 mm	30,0	32,0	22 mm
K- 07 40 34 44	G 3/8	LW 9 mm	30,0	32,0	22 mm

Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.