


K-MUFFEN VALUE LINE MS NI

Sockets

HANSA FLEX

Osobine

maks. radni pritisak	60 bar
maks. radna temperatura	150 °C
Materijal	Mesing, niklovan

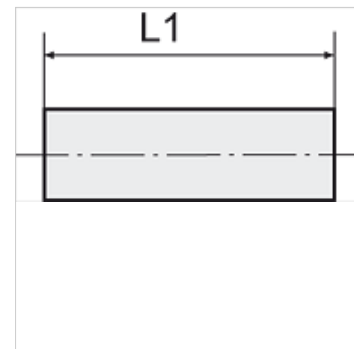

Napomena

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Ostali podaci na upit.

Opis

For air, water, steam, oil, etc.

Artikal

Naziv	Navoj	L1 (mm)	SW
K- 07 40 15 16	M 5	11,0	8 mm
K- 07 40 15 17	G 1/8	15,0	14 mm
K- 07 40 15 18	G 1/4	22,0	17 mm
K- 07 40 15 19	G 3/8	23,0	22 mm
K- 07 40 15 20	G 1/2	28,0	26 mm
K- 07 40 15 21	G 3/4	32,0	32 mm